




LAMINATE

Select 833
Smart Pro 832

p. 428
p. 432

OUR SELECTION OF ACCESSORIES FOR LAMINATE




Skirting
Large veneer skirting matching the colour of the laminate flooring.

See p. 498 for detailed info



SoundblockFoam
Provides 19dB sound reduction when positioned under the flooring.

See p. 499 for detailed info



3 in 1 transition profile
Adaptable aluminium transition profile to protect the end of the laminate flooring and provide elegant finish.

See p. 498 for detailed info



LAMINATE

Smart Pro 832 and Select 833 combine functional needs like durability, resistance and cost, with the elegance of the authenticity. This range is dedicated for the specific needs of Stores and Shops & Hospitality segments.

LAMINATE		
Select 833		p. 428
Smart Pro 832		p. 432



SELECT 833

COMMERCIAL APPLICATIONS WITH HIGH TRAFFIC AREAS:

- Exclusive designs for a signature ambiance
- High density board with a unique construction: RML (Reinforced multi layer)
- Low swelling board and treated edge for a better protection against water spilling
- Quick and fast locking system
- Antistatic properties
- 100% matching accessories



SMART PRO 832

SEMI-COMMERCIAL UP TO COMMERCIAL APPLICATIONS:

- Unique designs adapted to activity
- Low swelling board and treated edge for a better protection against water spilling
- Quick and fast locking system
- Antistatic properties
- 100 % matching accessories



Class	32	33
Abrasion class	AC 4	AC 5
Impact class	IC 2	IC 3
Product construction	DPL	DPL with RML Technology

SELECT 833



A dedicated laminate collection developed for the specific needs of commercial applications

SENSORIAL BENEFITS


- Imagined and designed to create signature ambience
- Exclusive designs selected for stores and shops and hospitality
- Acoustic and thermal confort

FUNCTIONAL BENEFITS

- Overnight installation: quick installation, no mess, can be used immediately
- 100% matching accessories
- Heavy display furniture & use of trolleys and carts: reinforced construction to avoid damage and indentation

ENVIRONMENTAL BENEFITS

- 84% natural, 100% recyclable and produced in ISO certified plant

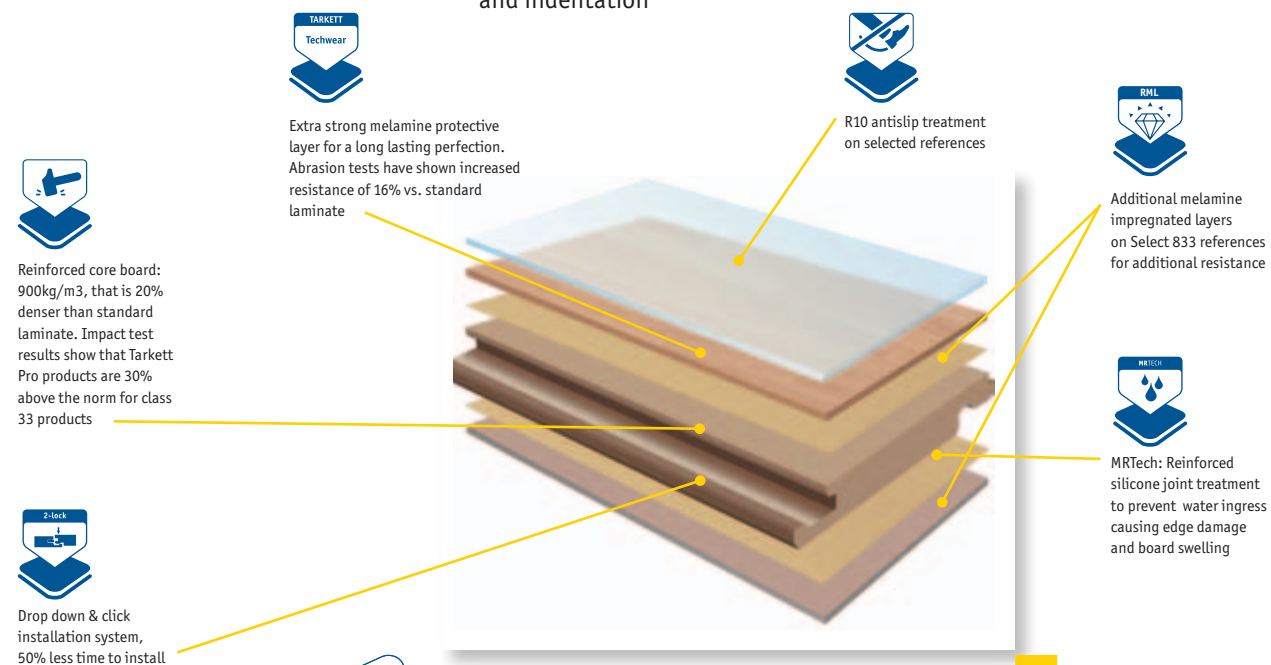

Available: Soundblock
Foam underlayer,
noise reduction of 19 dB!
see p. 499

SELECT 833

TECHNICAL DATA	STANDARDS	Select 833
Classification		
Classification	ISO 10874 (EN 685) commercial	Class: 33
UPEC Classification	UPEC Classification Impact sound reduction EN ISO 717/2	None 19dB
Characteristics		
Total thickness	ISO 24346 (EN 428)	8mm
Total weight	ISO 23997 (EN 430)	8kg/m ³
Technical performances		
Reaction to fire	EN 13501-1	C _{fl} - S1
Slip resistance	DIN 51130 EN 13893	≥ 0.30 - Class DS
Dimensional variations	EN 13 329	≥ 0.9mm
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No change in appearance or damage
Curl resultant to heat	ISO 23999 (EN 434)	Non Applicable
Electrostatic properties	EN 1815 EN 1081	up ≤ 2kV
Stain resistance	EN 438-2 (Group 1, 2 & 3)	Groups 1 & 2: grade 5 - group 3: ≥ grade 4
Hygiene	-	Non Applicable
Thermal resistance Underfloor heating	DIN EN 12667	≤ 0.150m ² K/W
Form of delivery	EN 24341 (EN 426)	Planks

The above information is subject to modifications for the benefit of further improvement (01/2014).
For more detailed technical information, please contact Tarkett.




Download the product offer

SELECT 833



Farmhouse - Pine


Modern Wenge



Luminous

◆ 42023 346

Mocha Sherwood Oak



Eir

◆ 42021 216

Coffee



Stone Reflection

★ 42028 391

Heritage Traditional Oak



Eir Stratochrome / Antislip

◆ 42022 394 / 42031 394

Heritage Whitened Oak



Antislip

◆ 42031 395

Deep Honey Sherwood



Eir / Antislip

◆ 42021 214 / 42031 214

Princess Fontainebleau Oak



Antislip

▲ 42031 222

Antique Maple



Standard

● 42030 393

Wine



Matt Wood

★ 42025 390

Narrow Light Patchwork



Matt Wood

★ 42027 386

Beige Sherwood Oak



Eir / Antislip

◆ 42021 218 / 42031 218


Rough Cherry



Matt

● 42024 388

White and Hype



Eir

◆ MT0*

Antique Paint



Matt

◆ 42024 387

Suede Sherwood Oak



Eir

◆ 42021 217

Farmhouse Pine



Matt Wood

◆ 42025 397


Barn Oak



Autentico / Antislip

◆ 42020 392 / 42031 392

Bergamo Grey Oak



Matt Wood

▲ 42025 362


Contrasting Pine



Autentico

◆ 42020 396

Narrow Fumes Patchwork



Patina

★ 42026 359

TECHNICAL DATA	STANDARDS	Select 833
Classification		
Classification	ISO 10874 (EN 685) commercial	Class: 33
UPEC Classification	UPEC Classification Impact sound reduction EN ISO 717/2	None 19dB
Characteristics		
Total thickness	ISO 24346 (EN 428)	8mm
Total weight	ISO 23997 (EN 430)	8kg/m ³
Technical performances		
Reaction to fire	EN 13501-1	C _{fl} - S1
Slip resistance	DIN 51130 EN 13893	≥ 0.30 - Class DS
Dimensional variations	EN 13 329	≥ 0.9mm
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No change in appearance or damage
Curl resultant to heat	ISO 23999 (EN 434)	Non Applicable
Electrostratic properties	EN 1815 EN 1081	up ≤ 2kV
Stain resistance	EN 438-2 (Group 1, 2 & 3)	Groups 1 & 2: grade 5 group 3: ≥ grade 4
Hygiene	-	Non Applicable
Thermal resistance Underfloor heating	DIN EN 12667	≤ 0.150m ² K/W

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett.

Wild Light Stone



Stone Reflection


★ 42028 356

Jeans



Matt

★ MT0*

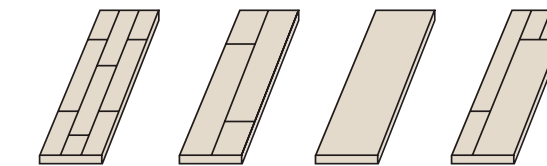

3 strips ▲ 2 strips ● plank ◆ patchwork ★

*MT0: made to order. Please check with your local sales representative or call our local customer service

Select 833

Main Product Features


- Superior resistance to abrasion and scratches
- Low swelling board and treated edges (MR tech treatment)
- Antistatic: no unpleasant electro-static discharges
- 2-lock: most user-friendly locking system on the market



Surface and Edge Treatment



Sustainability Tag



Logistics Information

mm	1 292 x 194 x 8	planks/box	8
class	33	m ² /box	2 005
guarantee	10 years professional use	box/pallet	56
click	2-Lock	kg/m ²	8

General Information



Play with the Room Designer

SMART PRO 832



The designs end customers are looking for with the quality required for housing, small shops and hospitality segments

SENSORIAL BENEFITS

- Imagined and designed to create signature ambiance
- Exclusive designs selected for Stores and shops and hospitality
- Acoustic and thermal confort

FUNCTIONAL BENEFITS

- Overnight installation: quick installation, no mess, can be used immediately
- 100 % matching accessories
- Heavy display furniture & use of trolleys and carts: reinforced construction to avoid damage and indentation

ENVIRONMENTAL BENEFITS

- 84% natural, 100% recyclable and produced in ISO certified plant



Reinforced core board: 900kg/m³, that is 20% denser than standard laminate. Impact test results show that Tarkett Pro products are 30% above the norm for class 32 products



Drop down & click installation system, 50% less time to install



Extra strong melamine protective layer for a long lasting perfection. Abrasion tests have shown increased resistance of 16% vs. standard laminate



R10 antislip treatment on selected references



MRTech: Reinforced silicone joint treatment to prevent water ingress causing edge damage and board swelling



Available: Soundblock Foam underlayer, noise reduction of 19 dB! see p. 499

SMART PRO 832

TECHNICAL DATA	STANDARDS	Smart PRO 832
Classification		
Classification	ISO 10874 (EN 685) commercial	Class: 32
UPEC Classification	UPEC Classification Impact sound reduction EN ISO 717/2 Acoustic improvement NF S31-074 NF UPEC.A+ certificate (NF 189)	U3 P3 19dB - ST10-026
Characteristics		
Total thickness	ISO 24346 (EN 428)	8mm
Total weight	ISO 23997 (EN 430)	7.8kg/ m ³
Technical performances		
Reaction to fire	EN 13501-1	C _{fl} - S1
Slip resistance	DIN 51130 EN 13893	≥ 0.30 - Class DS
Dimensional variations	EN 13 329	≥ 0.9mm
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No change in appearance or damage
Curl resultant to heat	ISO 23999 (EN 434)	Non Applicable
Electrostatic properties	EN 1815 EN 1081	up ≤ 2kV
Stain resistance	EN 438-2 (Group 1, 2 & 3)	Groups 1 & 2: grade 5 - group 3: ≥ grade 4
Hygiene	-	Non Applicable
Thermal resistance Underfloor heating	DIN EN 12667	≤ 0.150m ² K/W
Form of delivery	EN 24341 (EN 426)	Planks

The above information is subject to modifications for the benefit of further improvement (01/2014).
For more detailed technical information, please contact Tarkett.




Download the product offer

SMART PRO 832



Light Oiled - Oak


Modern Wenge



◆ 42023 346

Luminous


Mocha Sherwood Oak



◆ 42021 216

Eir

King Fontainebleau Oak



▲ 42012 224

Eir

Deep Honey Sherwood Oak



◆ 42012 214

Eir

Light Oiled Oak



◆ 42017 361

Matt Wood

Heritage Traditional Oak



◆ 42013 394

Eir Stratochrome

Heritage Whitened Oak



◆ 42011 395

Autentico

Princess Fontainebleau Oak



▲ 42012 222

Eir

Canyon Beech



◆ 42018 074

Standard


Beige Sherwood Oak



◆ 42012 218

Eir

Rough Cherry



● 42016 388

Matt


Polar Ash



● 42017 389

Matt Wood

White and Hype



◆ MTO*

Eir


Suede Sherwood Oak



◆ 42021 217

Eir

Bergamo Grey Oak



▲ 42017 362

Matt Wood

TECHNICAL DATA	STANDARDS	Smart PRO 832
Classification		
Classification	ISO 10874 (EN 685) commercial	Class: 32
UPEC Classification	UPEC Classification	U3 P3
	Impact sound reduction EN ISO 717/2	19dB
	Acoustic improvement NF S31-074 NF UPEC.A+ certificate (NF 189)	- ST10-026
Characteristics		
Total thickness	ISO 24346 (EN 428)	8mm
Total weight	ISO 23997 (EN 430)	7.8 kg/m³
Technical performances		
Reaction to fire	EN 13501-1	C _{fl} - S1
Slip resistance	DIN 51130 EN 13893	≥ 0.30 - Class DS
Dimensional variations	EN 13 329	≥ 0.9mm
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No change in appearance or damage
Curl resultant to heat	ISO 23999 (EN 434)	Non Applicable
Electrostatic properties	EN 1815 EN 1081	up ≤ 2kV
Stain resistance	EN 438-2 (Group 1, 2 & 3)	Groups 1 & 2: grade 5 group 3: ≥ grade 4
Hygiene	-	Non Applicable
Thermal resistance Underfloor heating	DIN EN 12667	≤ 0.150m² K/W

The above information is subject to modifications for the benefit of further improvement (01/2014).
For more detailed technical information, please contact Tarkett.

Soft Cumin Oak



◆ 42014 365

Eir Light Catcher


Soft Cinnamon Oak



◆ 42014 368

Eir Light Catcher

Contrasting Pine



◆ 42011 396

Autentico


Grey Mocha Sherwood Oak



◆ 42012 289


Eir

Wild Light Stone



★ 42019 356

Stone Reflection

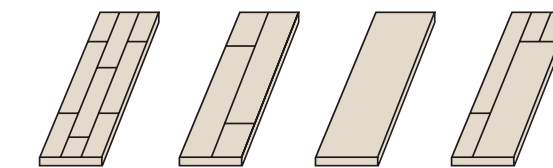

3 strips ▲ 2 strips ● plank ◆ patchwork ★

*MTO: made to order. Please check with your local sales representative or call our local customer service

Smart PRO 832

Main Product Features


- Superior resistance to abrasion and scratches
- Low swelling board and treated edges (MR tech treatment)
- Antistatic: no unpleasant electro-static discharges
- 2-lock: most user-friendly locking system on the market



Surface and Edge Treatment



Sustainability Tag



Logistics Information

mm	1 292 x 194 x 8	planks/box	8
class	32	m ² /box	2 005
guarantee	10 years professional use	box/pallet	56
click	2-Lock	kg/m ²	7.8

General Information



Play with the Room Designer