

STAIRS & ACCESSIBILITY



STAIRS & ACCESSIBILITY

Tapiflex Stairs


p. 320

Warning Tile & Tactile strip

p. 322




OUR SELECTION OF ACCESSORIES FOR STAIRS & ACCESSIBILITY



Warning tile

Helps recognize a change in level for visually impaired people, in accordance with regulatory requirements.

See p. 492 for detailed info


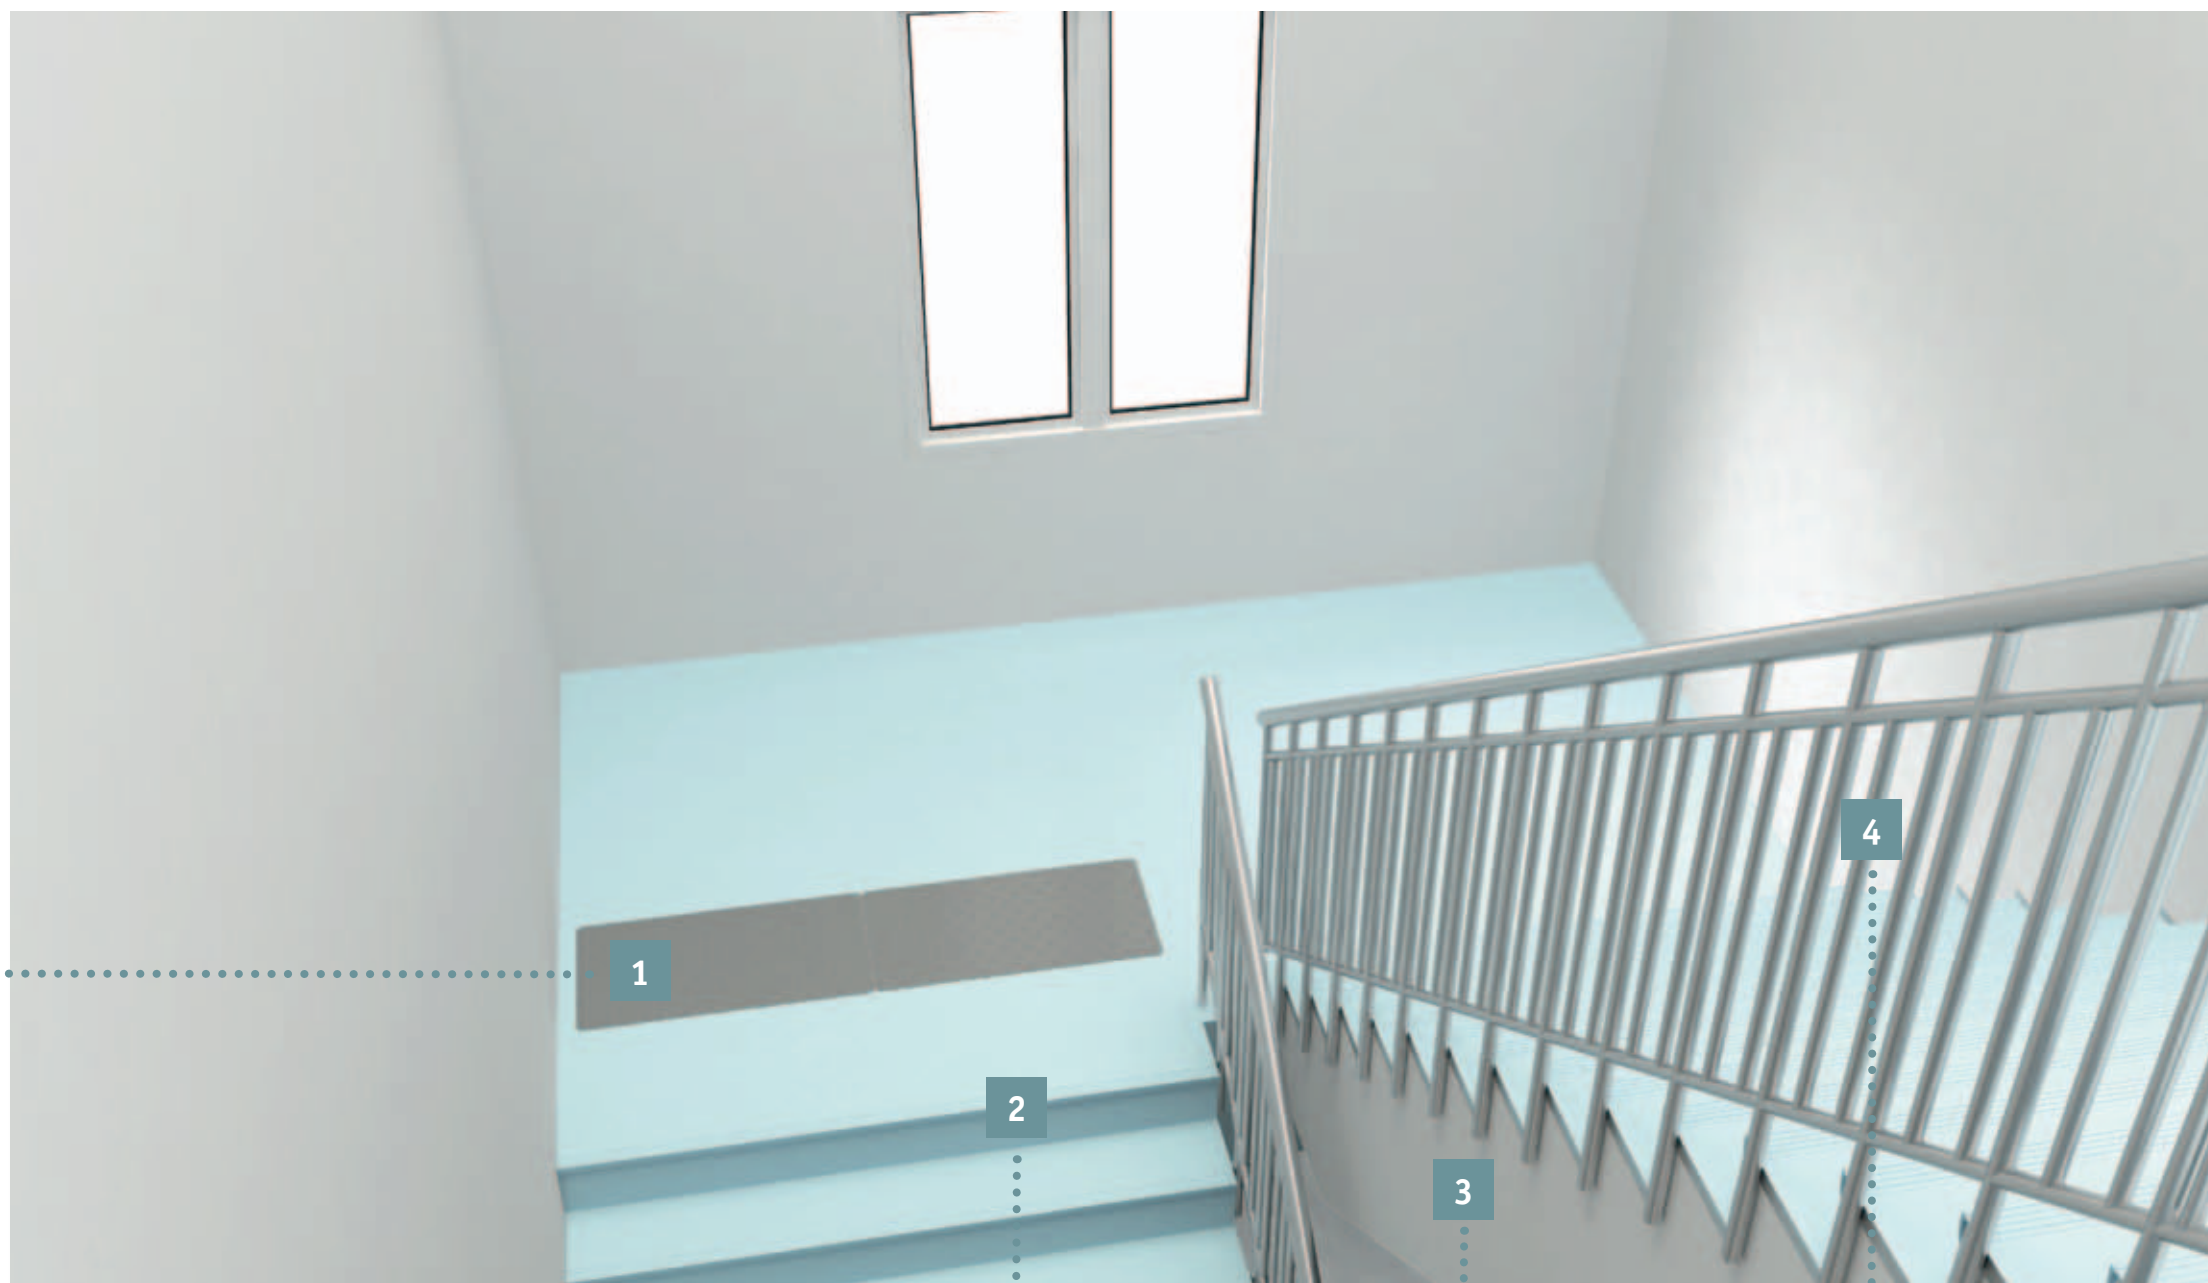


Stair nosing

NM1

Flexible PVC stair nosing. Cut to size on site and fixed with adhesive before floor covering.

See p. 484 for detailed info

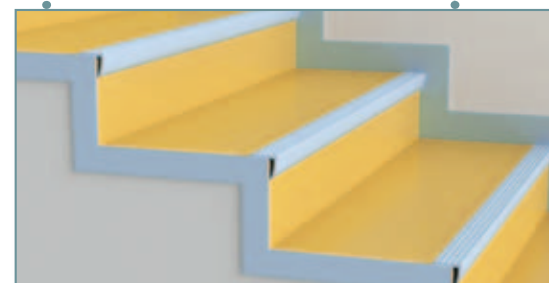

Stair borders

Form a neat and attractive edge around the open end of a step. Colour combination with PVC stair nosing.

Inside – SB1


Protects the edge of the floor covering and hides it.

Outside – SB2

Protects the edge of the floor covering and hides it.

See p. 485 for detailed info

TAPIFLEX STAIRS

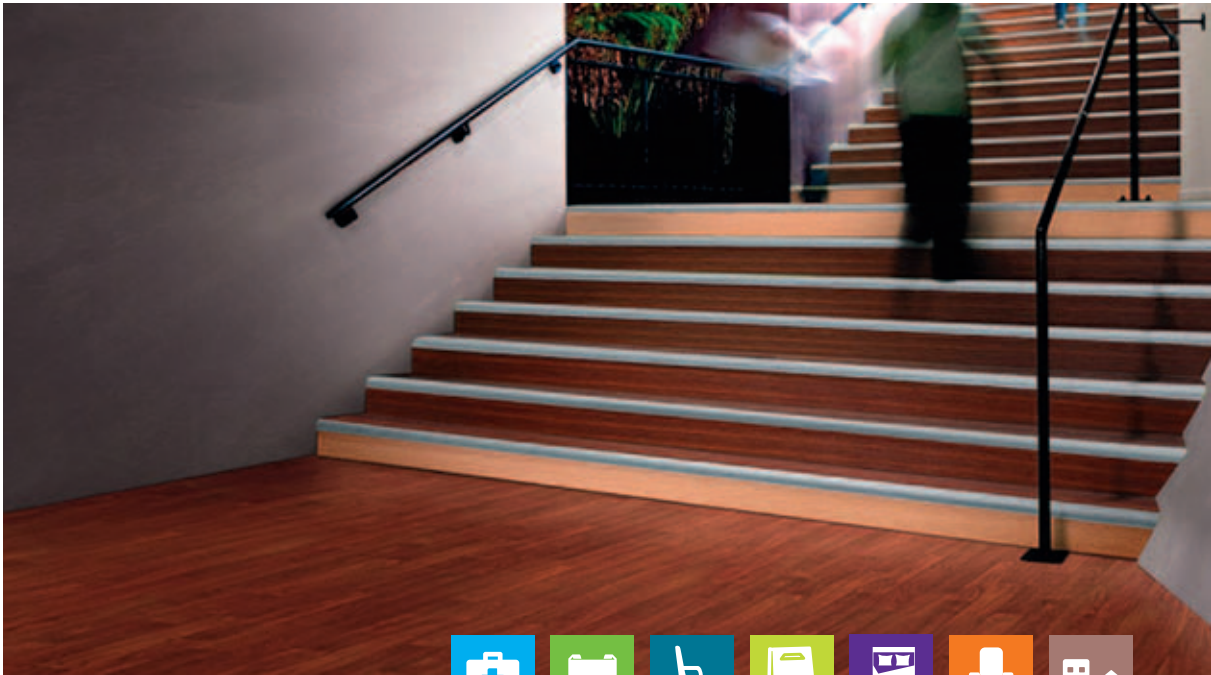

Vinyl stair solutions to offer safety and noise reduction in all buildings

SENSORIAL BENEFITS


- Wide range of stair designs ready to lay, with wood and concrete contrastful effects
- Matching designs in Tapiflex Evolution, Excellence and Essential ranges
- Wide range of dedicated accessories

FUNCTIONAL BENEFITS

- Built-in stair noses to create contrast and offer safety to users
- Highly resistant and easy to maintain thanks to TopClean XP surface treatment
- Combined accessibility kit for visually impaired people, in accordance with regulatory requirements (warning tile and tactile strip)

ENVIRONMENTAL BENEFITS

- Unrivalled indoor air quality
- Improved carbon footprint

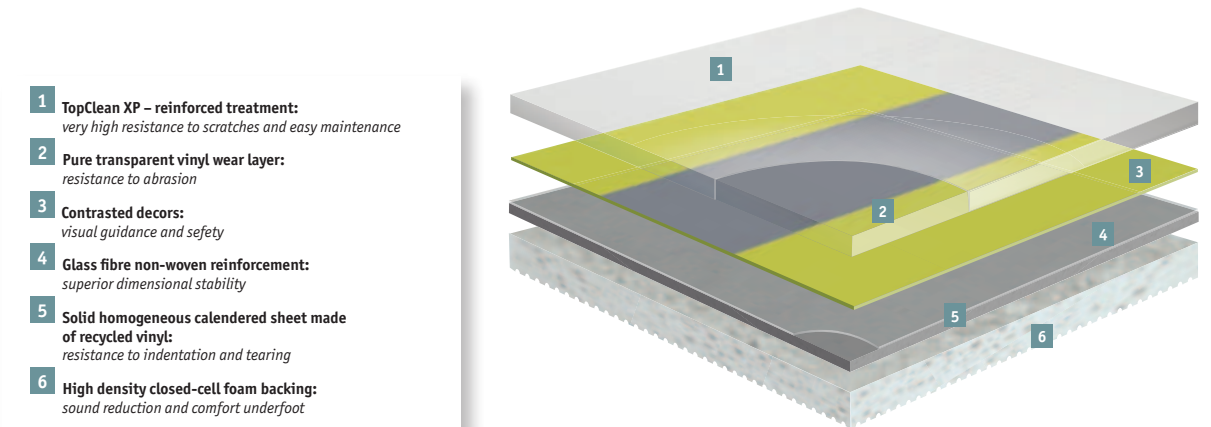

TAPIFLEX STAIRS

TECHNICAL DATA	STANDARDS	Tapiflex Stairs
Classification		
Classification	ISO 10581 (EN 649) commercial industrial UPEC Classification NF UPEC certificate number (Ref NF189)	Classes: 34 43 U4 P3 E2 C2 18dB 305-032.1
Polyurethane reinforcement (PUR)	—	TopClean XP
Characteristics		
Total thickness	ISO 24346 (EN 428)	3.50mm
Wear layer thickness	ISO 24340 (EN 429)	1.00mm
Total weight	ISO 23997 (EN 430)	3 670g/m²
Technical performances		
Residual indentation	Average measured value ISO 24343-1 (EN 433) requirement	≤0.20mm
Reaction to fire	EN 13501-1	C _s s1 glued over any A2 _s or A1 _s substrate (concrete) C _s s1 glued over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Dimensional stability Curl resultant to heat	ISO 23999 (EN 434)	≤ 0.10% ≤ 8mm
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	—	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Abrasion group	EN 660-2	Group T: ≤ 2mm³
Electrostatic properties	EN 1815 EN 1081	≤ 2 kV on concrete R1> 10⁹ ohms
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL _w = 18dB
Form of delivery		
Form of delivery	ISO 24341 (EN 426)	Rolls: 231m x 1.02m
Colours		
Colours	—	17


TECHNICAL DATA	STANDARDS	Warning Tile	Tactile Strip
Classification			
Classification	NF P 98 351	Compliant	Compliant
Characteristics			
Thickness		Base: 2mm (with chamfered edge) Stud: 5mm (with wear indicator)	1.6 lower part / 3.2 upper part
Weight		1.5kg / tile	16.8kg / roll
Form of delivery			
Form of delivery		Tiles: 80 x 42cm	Rolls: 15.241m x 30.48cm
Colours			
Colours		7	5

The above information is subject to modifications for the benefit of further improvement (01/2014).
For more detailed technical information, please contact Tarkett.




Download the product offer

TAPIFLEX STAIRS

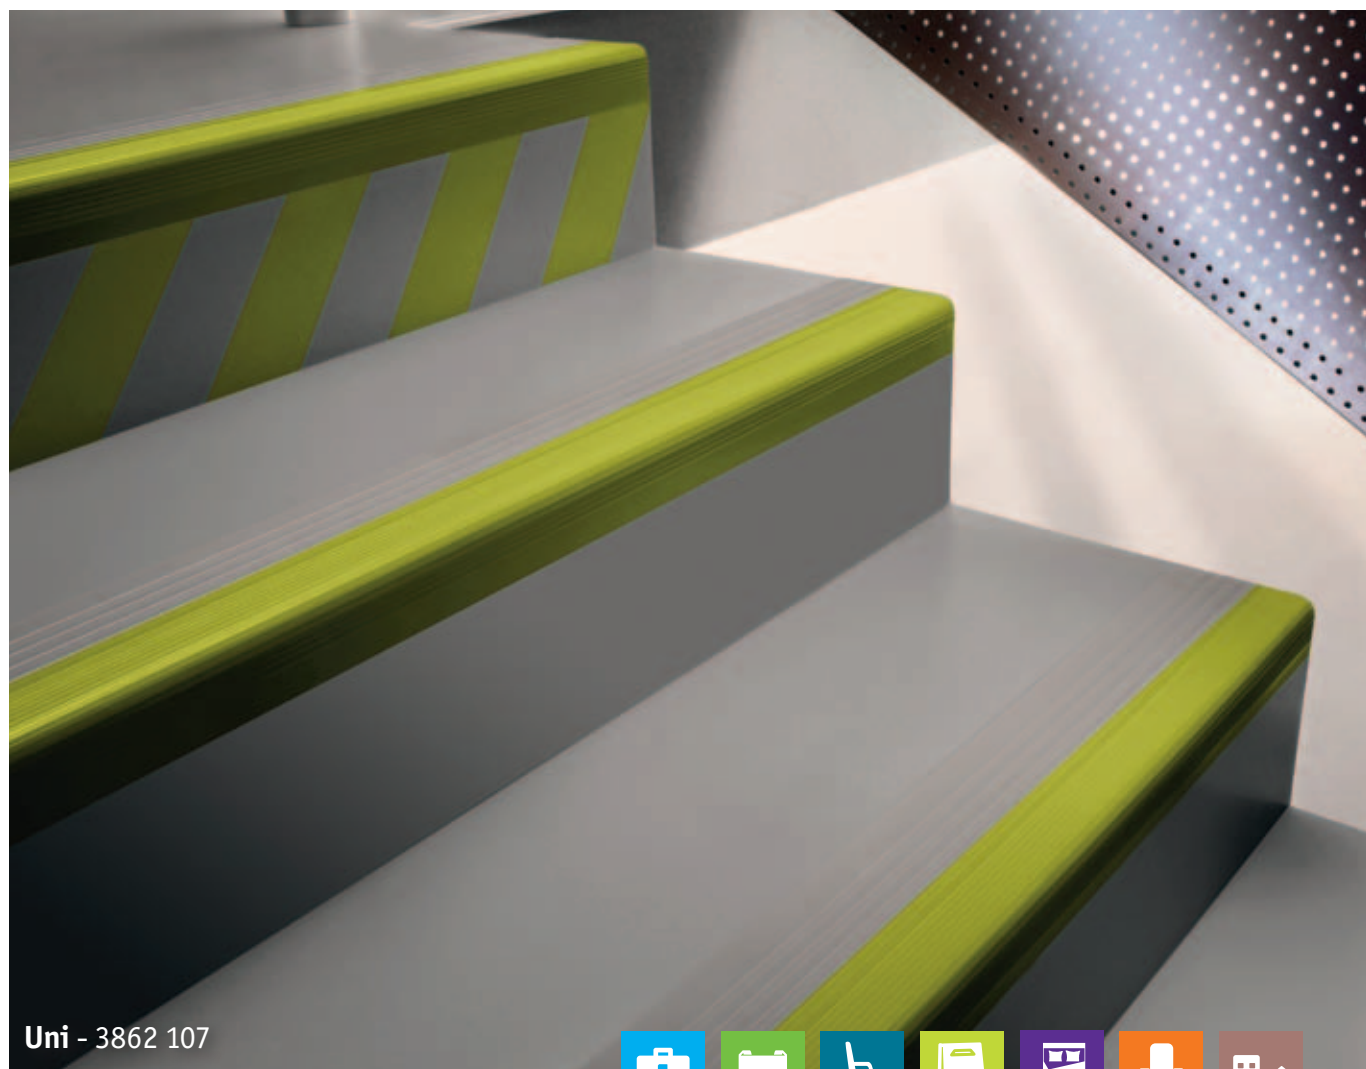

Uni

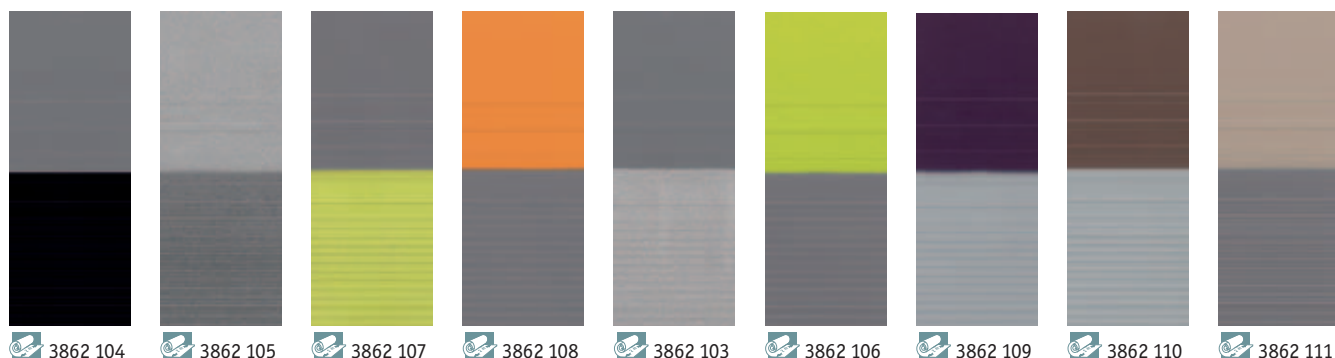

Security



3862 001

Concrete



3861 001

Esquisse




3861 015



3861 017



3861 014




3861 007


TECHNICAL DATA	STANDARDS	Tapiflex Stairs
Classification		
Classification	ISO 10581 (EN 649) commercial industrial	Classes: 34 43
	UPEC Classification NF UPEC certificate number (Ref NF189)	U4 P3 E2 C2 18dB 305-032.1
Polyurethane reinforcement (PUR)	—	TopClean XP
Characteristics		
Total thickness	ISO 24346 (EN 428)	3.50mm
Wear layer thickness	ISO 24340 (EN 429)	1.00mm
Total weight	ISO 23997 (EN 430)	3 670g/m ²
Technical performances		
Residual indentation	Average measured value	≤0.20mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	C _s s1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) C _s s1 glued over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Dimensional stability Curl resultant to heat	ISO 23999 (EN 434)	≤ 0.10% ≤ 8mm
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	—	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Abrasion group	EN 660-2	Group T: ≤ 2mm ³
Electrostatic properties	EN 1815 EN 1081	≤ 2 kV on concrete R1> 10 ⁹ ohms
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL _w = 18dB

The above information is subject to modifications for the benefit of further improvement (01/2014).
For more detailed technical information, please contact Tarkett.

Wood



3861 002

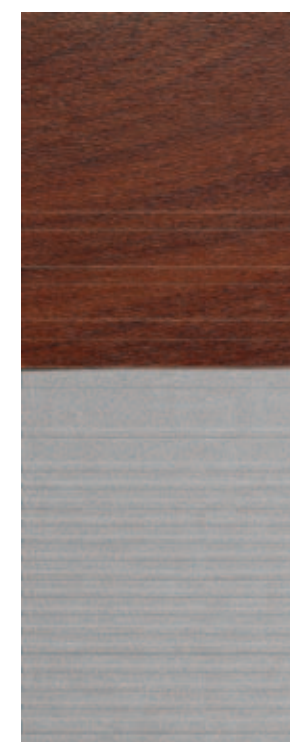

3861 003

TAPIFLEX STAIRS

Main Product Features

- Specially designed ridges to increase slip resistance and safety
- Stair noses with higher contrast for higher visibility
- Elastic foam backing to cushion impact in the event of falling and to reduce noise
- 1mm thick pure PVC wear layer: excellent resistance to scratches, abrasion, scuffing and soiling
- TopClean XP PUR: easy, low-cost maintenance

Surface Treatment



Sustainability Tag



(1) Progressively for all our professional vinyl products during 2014

Logistics Information

Available in rolls
Rolls length: 231m

Laying direction:




General Information




Play with the Room Designer

WARNING TILE

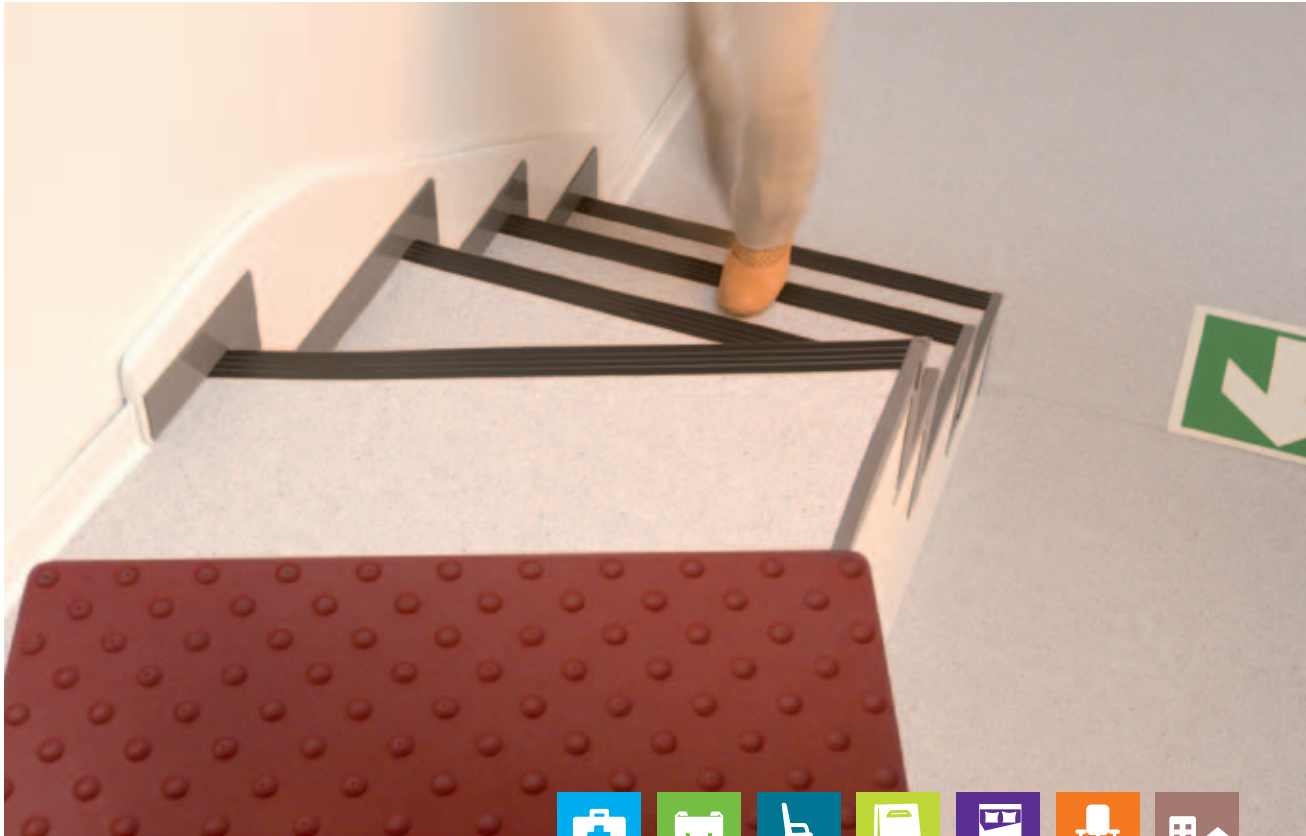


TECHNICAL DATA	STANDARDS	Warning Tile
Classification		
Classification	NF P 98 351	Compliant
Characteristics		
Thickness		Base: 2mm (with chamfered edge) Stud: 5mm (with wear indicator)
Weight		1.5kg / tile


The above information is subject to modifications for the benefit of further improvement (01/2014).
For more detailed technical information, please contact Tarkett.



1431 001




1431 002



1431 003



1431 006



1431 007

WARNING TILE

Main Product Features

- Tactile guide for visually impaired people to help recognize change in level
- To be positioned 50cm above and below stairs to signify danger area
- 5mm studs for a better recognition
- TopClean xp surface treatment for easy maintenance

Surface Treatment



Logistics Information




Available in tiles
Format: 800 x 420 x 7mm
Ordering unit: 1 box of 7 tiles

TACTILE STRIP



TECHNICAL DATA	STANDARDS	Tactile Strip
Classification		
Classification	NF P 98 351	Compliant
Characteristics		
Thickness		1.6 lower part / 3.2 upper part
Weight		16.8kg / roll

The above information is subject to modifications for the benefit of further improvement (01/2014).
For more detailed technical information, please contact Tarkett.



1440 001*
1497 001**



1440 020*
1497 020**



1440 024*
1497 024**



1440 040*
1497 040**



1440 047*
1440 001**

TACTILE STRIP

Main Product Features

- Tactile strip guide for visually impaired people to help finding their way
- To be positioned in front of welcome desks or specific access
- To contrast with surrounding floorings to ensure clear visibility
- Self-adhesive version for easy installation

Logistics Information



Available in rolls
Rolls length: 15.24lm
Width: 30.48cm
Thickness: 1.6/3.2mm

* Self adhesive. ** Dry back (to be glued)